

The background is a dark teal color. It features several large, semi-transparent circles of varying sizes. Overlaid on these circles and the background are numerous thin, light teal diagonal lines that create a sense of movement and depth.

Optics
Shinland

Each Ray is brighter in Shinland

SL-044B

Details

Material:	URC2500
Cover Material:	PC
Process:	Vaccum Aluminum Plating PC
MAX Diameter:	44.0mm
Height:	20.2mm
Matched Holder:	SL-HD-A
Matched Cover:	SL-044-CLEAR-LENS/SL-044-MIXING-LENS
ROSH Compliant:	YES
Status:	Ready

Optical Properties

Code	Typ. FWHM	Typ. Eff
SL-04415B	15°	93%
SL-04425B	25°	93%
SL-04438B	38°	93%
SL-04460B	60°	93%

Photo



Matched LED Source

CLU028

CXM-9
CHM-9

CXA15

V10 Gen6
V10 Gen7
blx C8
E8
Vesta TW6

Solერიq S9

105
1202/1203

G4-10

LC020C
LC006B


EDC-38C

NFCxL036B

Dimensional Figure

SL-044B


Measure Unit: mm

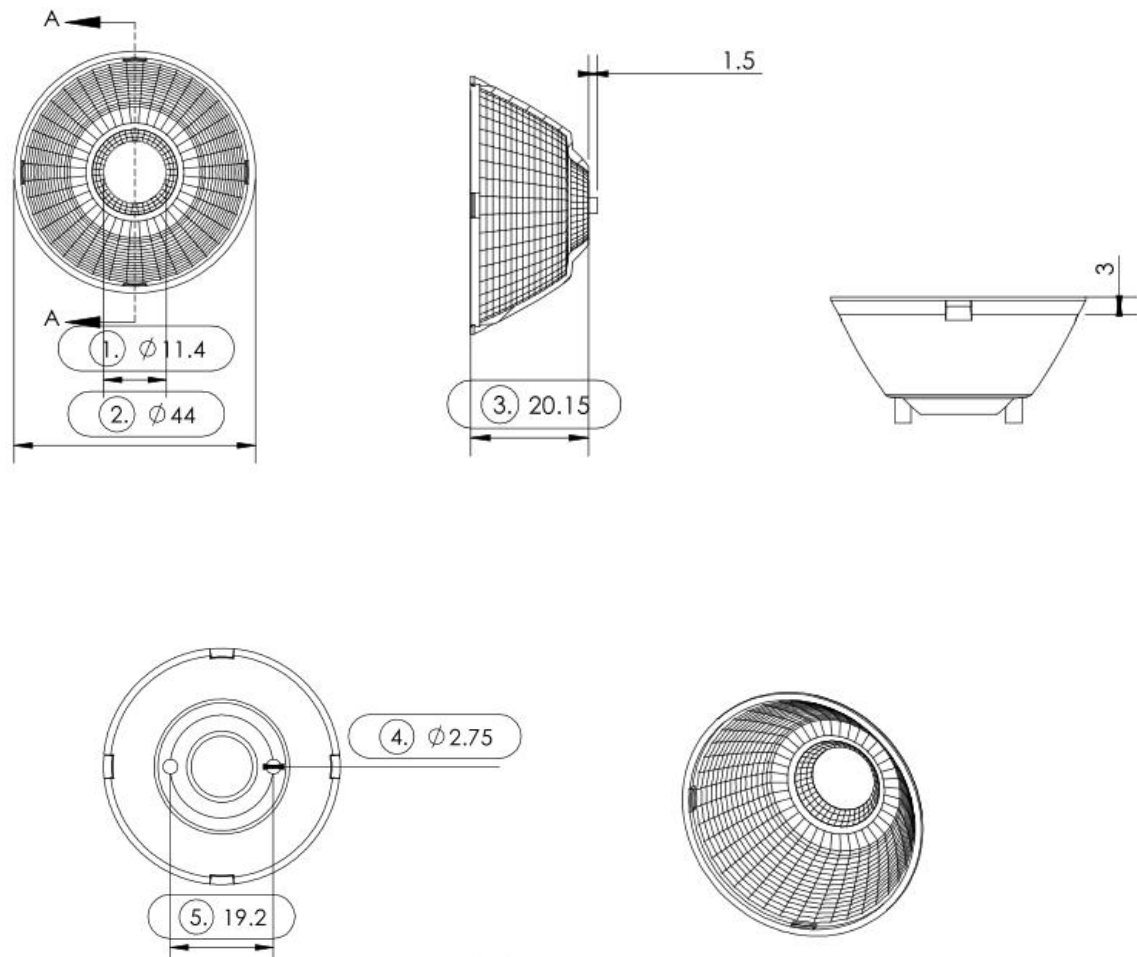

Dimensional Figure

SL-CXM-9-HD-A


Measure Unit: mm

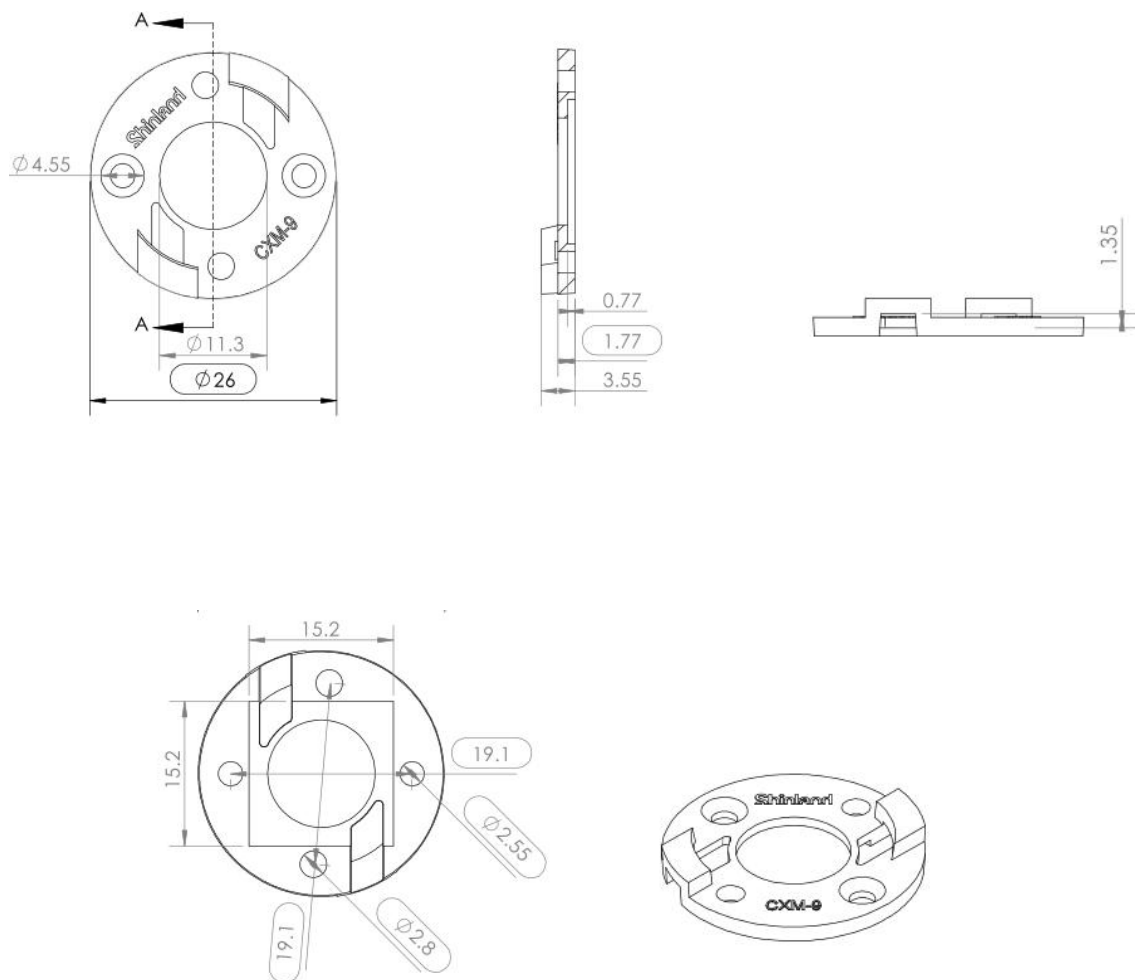

Dimensional Figure



SL-G4-10-HD-A

Measure Unit: mm


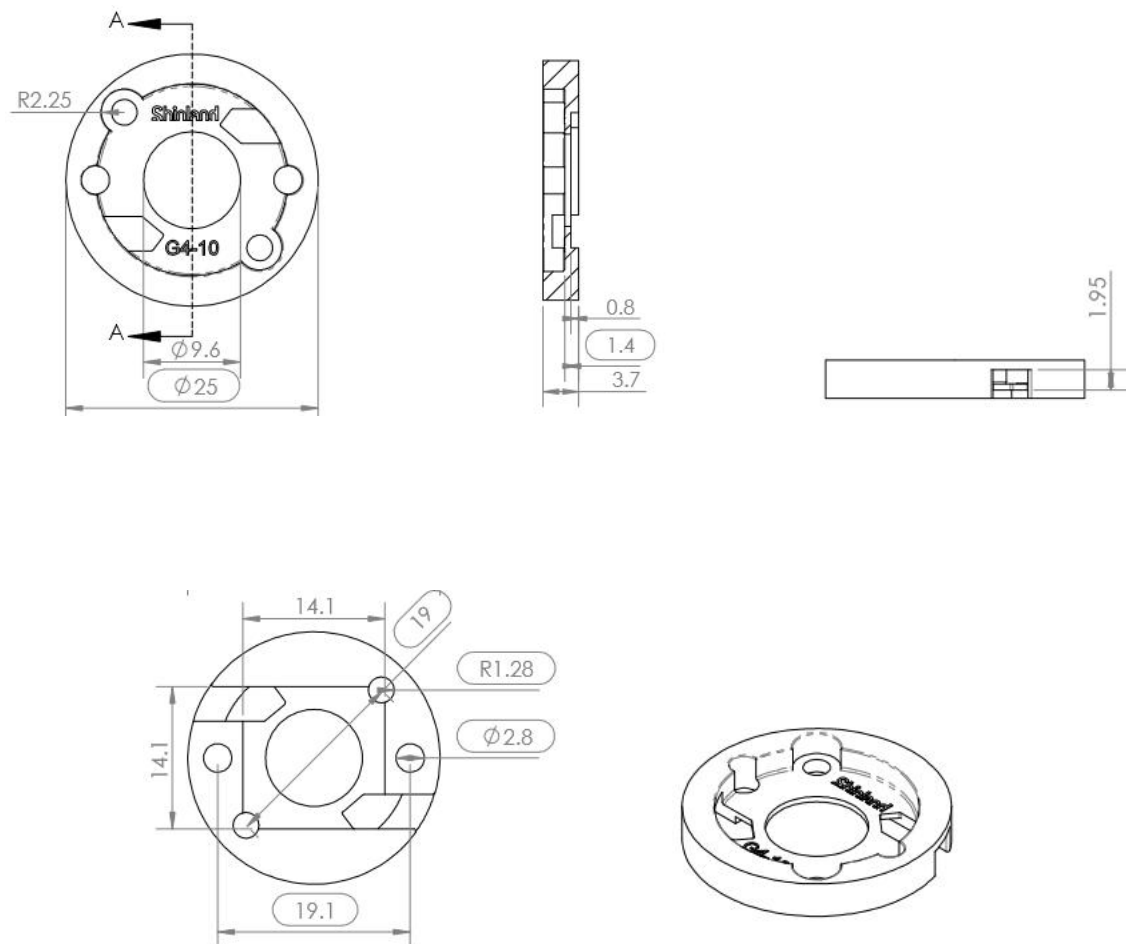


Distribution Curve Flux

SL-044B&SL-CXM-9-HD-A

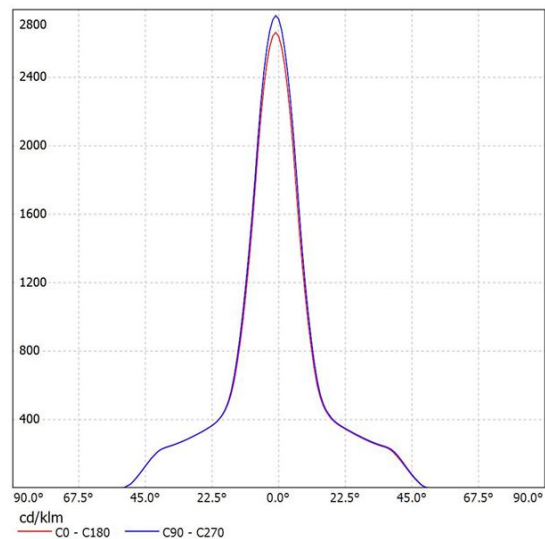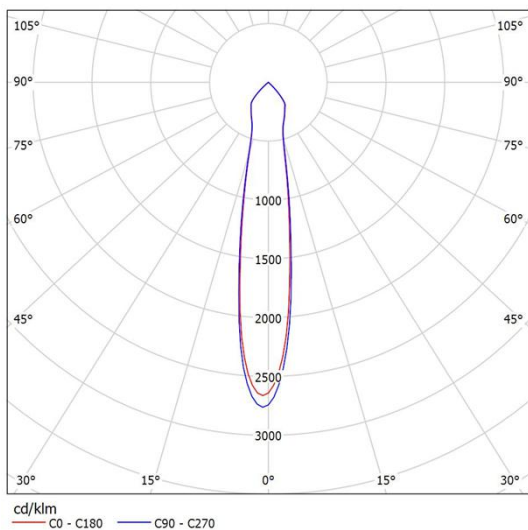



SL-04415B
K:3.79cd/lm,LED:CXM-9

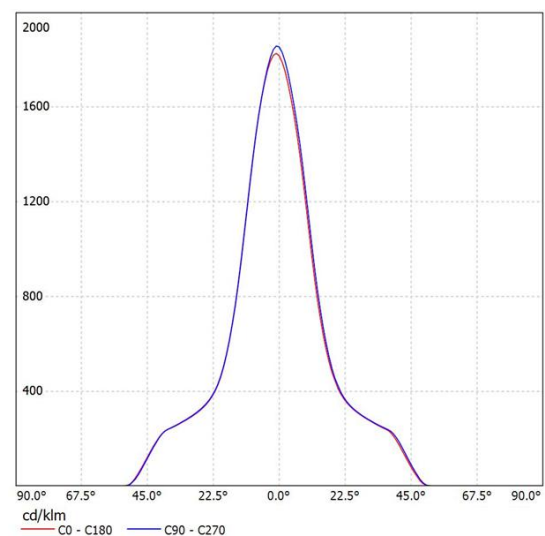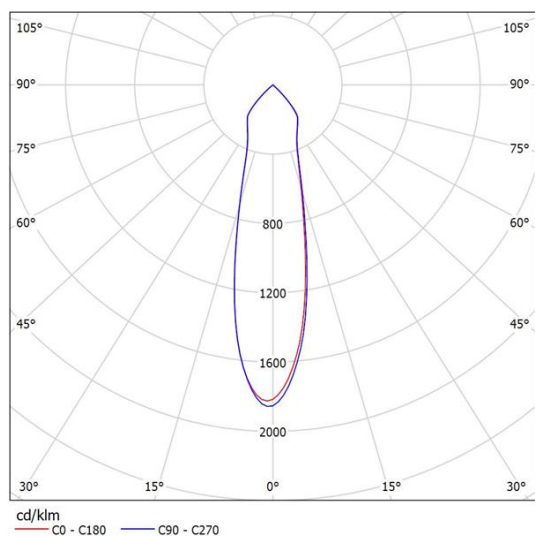



SL-04425B
K:2.53cd/lm,LED:CXM-9

Distribution Curve Flux

SL-044B&SL-CXM-9-HD-A

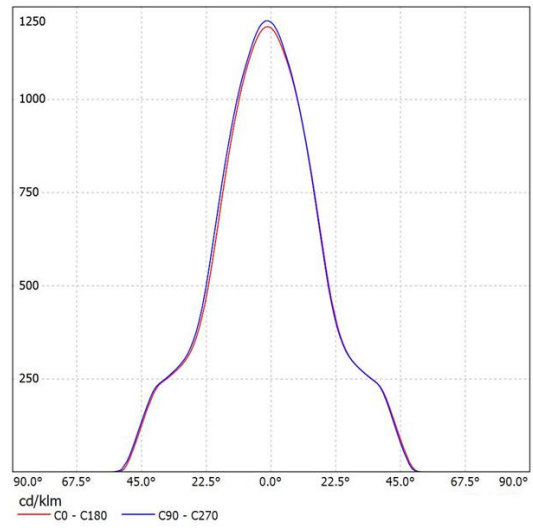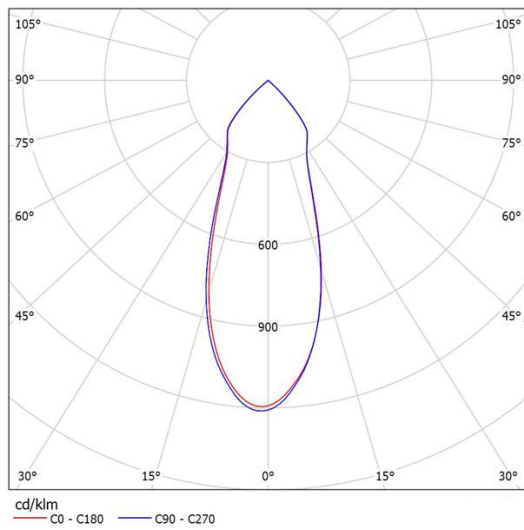



SL-04438B
K:1.64cd/lm,LED:CXM-9

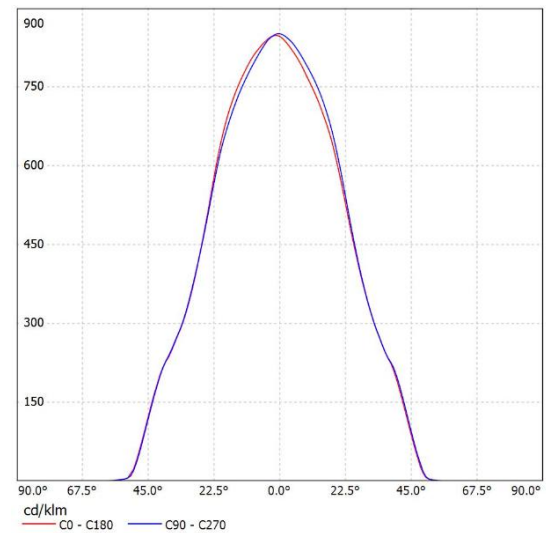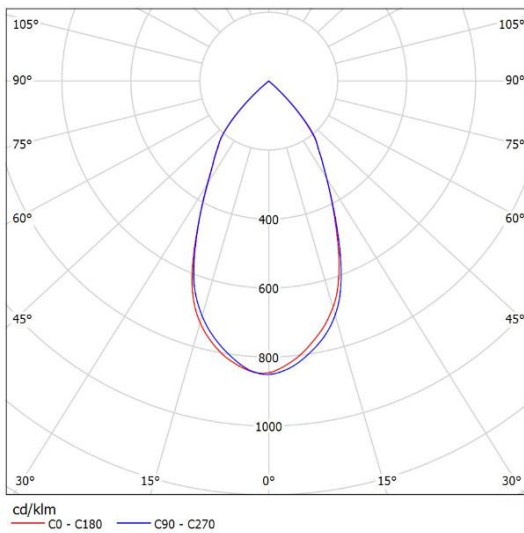



SL-04460B
K:1.14cd/lm,LED:CXM-9

Distribution Curve Flux

SL-044B&SL-G4-10-HD-A

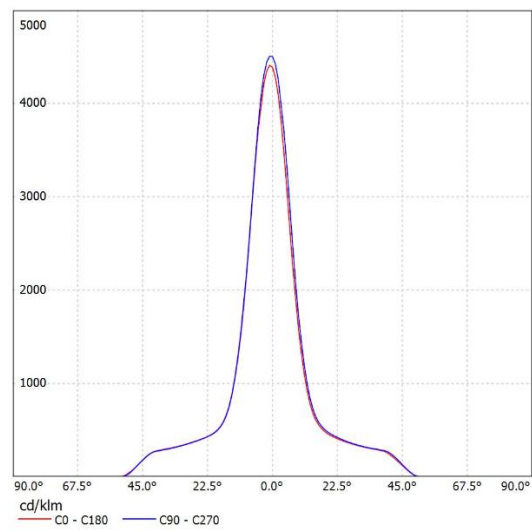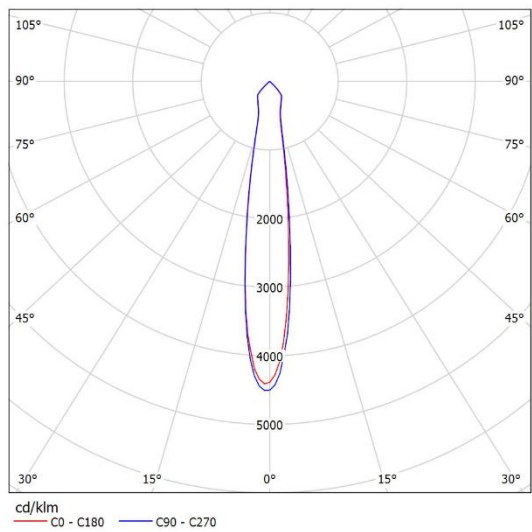



SL-04415B
K:4.68cd/lm,LED:G4-10

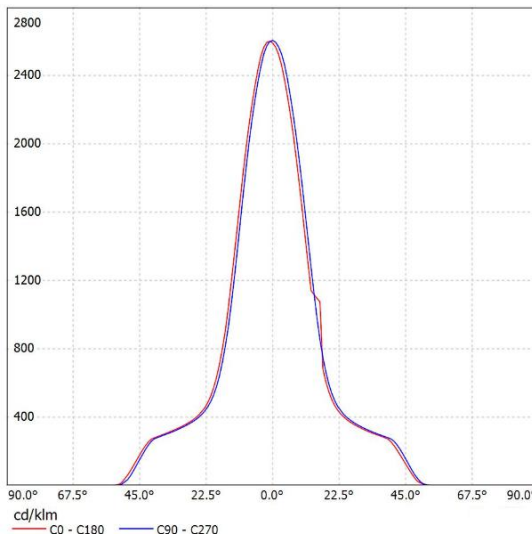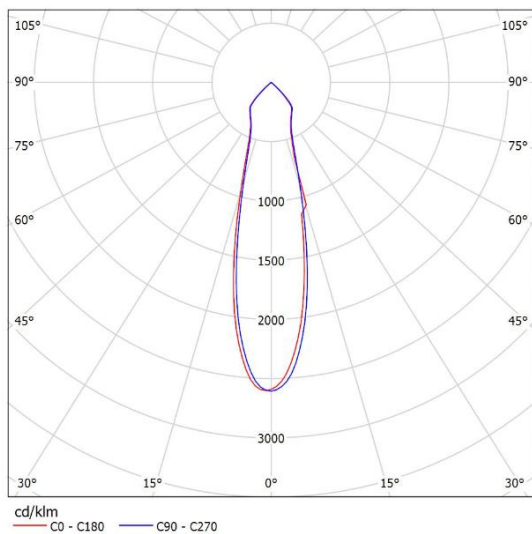



SL-04425B
K:2.69cd/lm,LED:G4-10

Distribution Curve Flux

SL-044B&SL-G4-10-HD-A

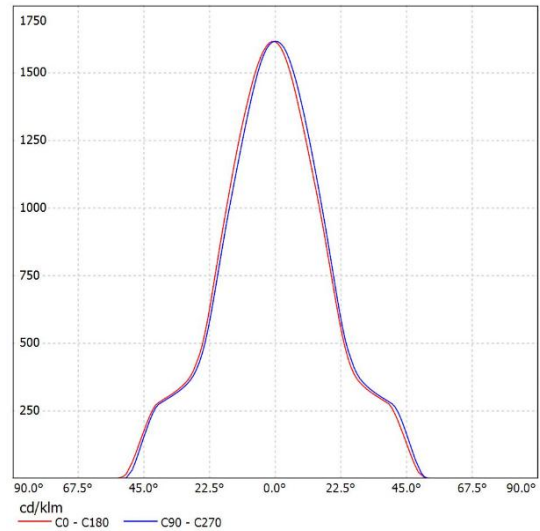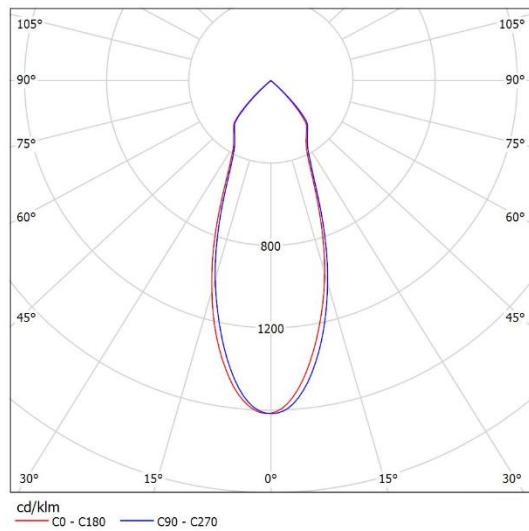



SL-04438B
K:1.68cd/lm,LED:G4-10

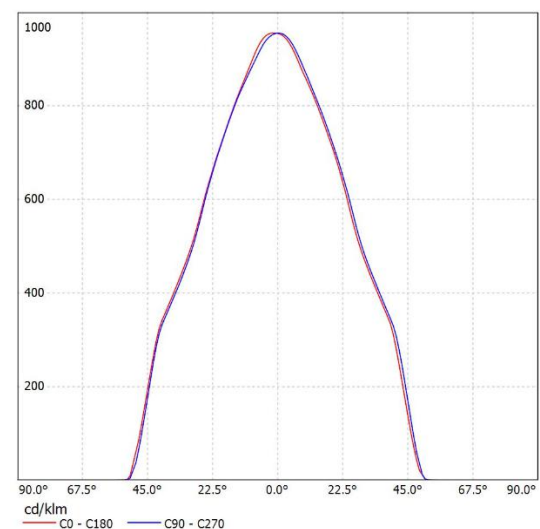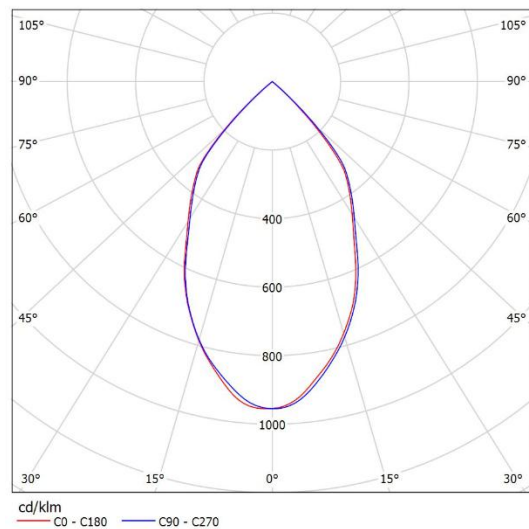



SL-04460B
K:0.99cd/lm,LED:G4-10

Distribution Curve Flux

SL-044B&SL-CLL020-HD-A

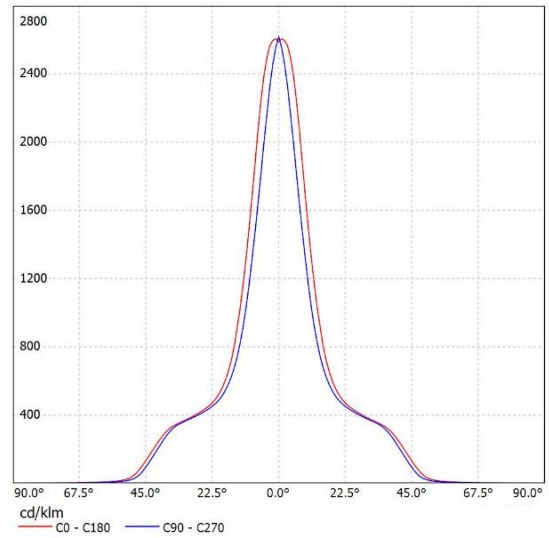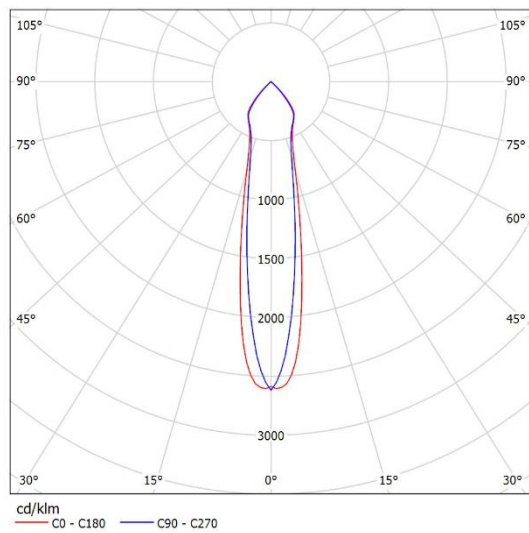



SL-04415B
K:2.95cd/lm,LED:V10 Gen7

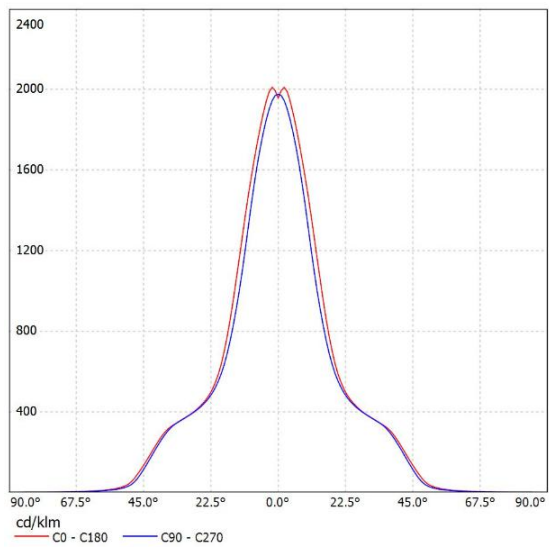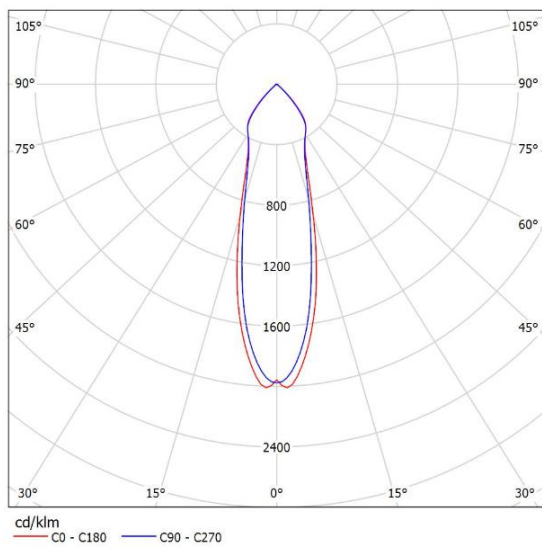



SL-04425B
K:2.25cd/lm,LED:V10 Gen7

Distribution Curve Flux

SL-044B&SL-CLL020-HD-A

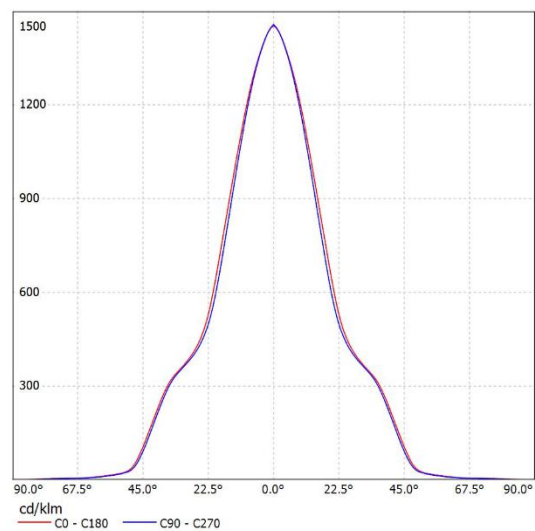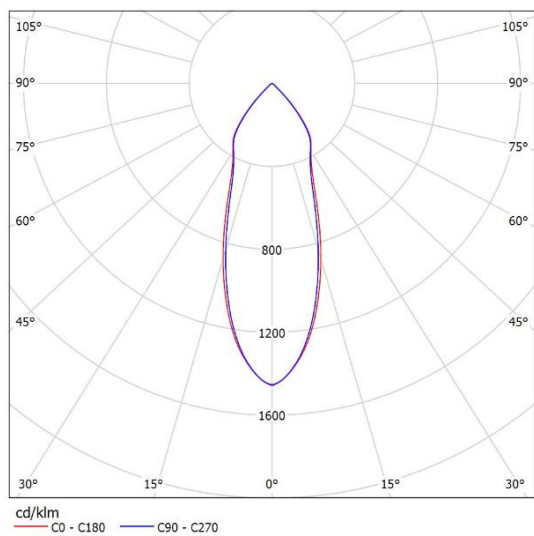

SL-04438B
K:1.60cd/lm,LED:V10 Gen7

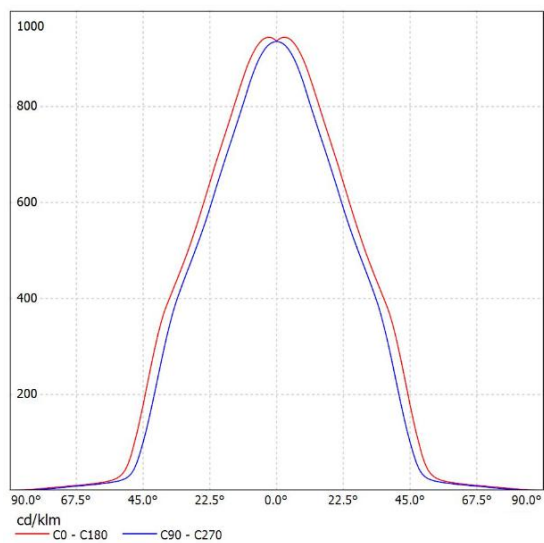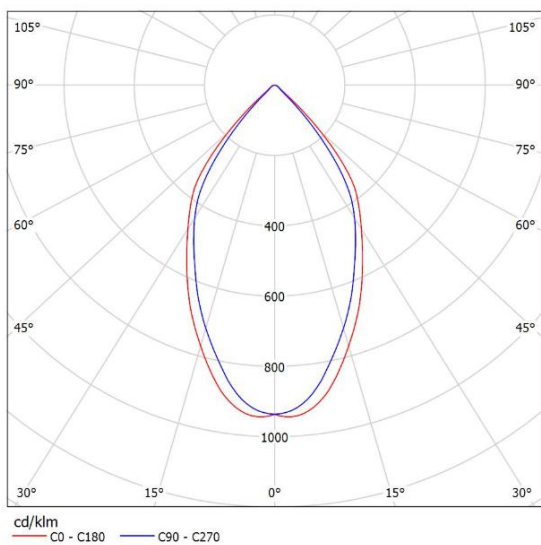

SL-04460B
K:1.05cd/lm,LED:V10 Gen7

Package Description

SL-044B

PART NO.	WITHOUT PC COVER		WITH PC COVER		BOX SIZE (cm)
	Number Per Box (pcs)	Box Weigh (kg)	Number Per Box (pcs)	Box Weigh (kg)	
SL-04415B	750	4. 20	700	5. 35	55 X 32 X 32
SL-04425B	750	4. 18	700	5. 35	55 X 32 X 32
SL-04438B	750	4. 30	700	5. 40	55 X 32 X 32
SL-04460B	750	4.25	700	5.20	55 X 32 X 32

Notes

- It is not allowed to scrub the reflective surface. If there is dust on the surface, please clean by soft cotton with little water.
 - It is forbidden to clean with industrial solvent such as ethanol.
 - Storage temperature: 0°C-40°C, and humidity:30%-95%.
 - Recommended operating temperature (PC) is <100°C.
 - Keep reflectors in package to void the dust.
 - Prohibit the reflector touch with acid or alkaline solvent
-

About Shinland

Shenzhen Shinland Co. Ltd, one of the longest and most professional company in lighting optical field, have 20 years experience. Different from other factory which only have simple process, all aspects included R&D, making mold, injection molding, vacuum coating and market support are our company own vertically integrated production.

Insisting on 'Quality First, Service First' and pragmatic, enterprising spirit, building the market by quality, casting our brand by credibility and integrity, Shinland now become the leading supplier of lighting optical solution in China.