

SL-PL-AG-035A

Details

Material: PC

Process: Injection
Diameter: 35mm
Heigh: 18.5mm

Matched Holder: Shinland's series A holders

Matched Cover: None ROHS Compliant: YES Status: Ready

Optical Properties

Code	Typ. Angle	Typ. efficiency
SL-PL-AG-035A-S	18°	85%
SL-PL-AG-035A-M	24°	88%
SL-PL-AG-035A-F	34°	88%

Photo




Matched LED type

CLU028
CLU701
CLU0BC
CXM-6
CHM-6
CXA13
CXB13
CXA15
CXB15
V6
E6
V8
E8


blx C6

Dimensional Figure


Measure Unit: mm SL-PL-AG-035A-S

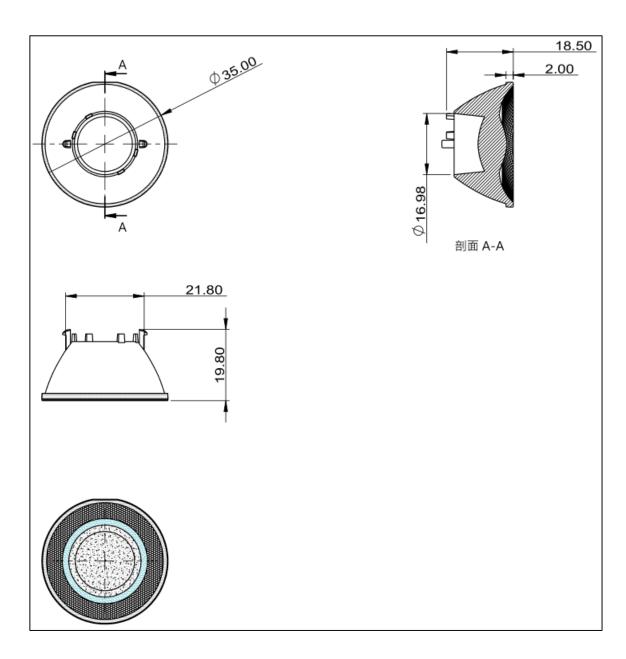

SL-PL-AG-035A-M

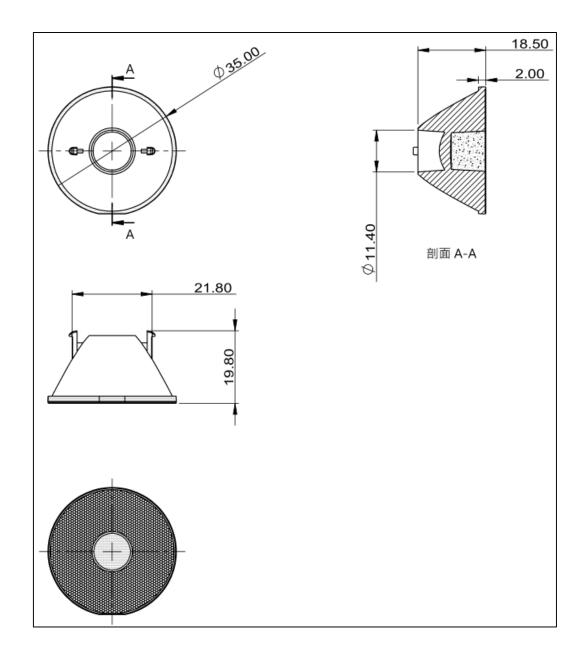


SL-PL-AG-035A-F

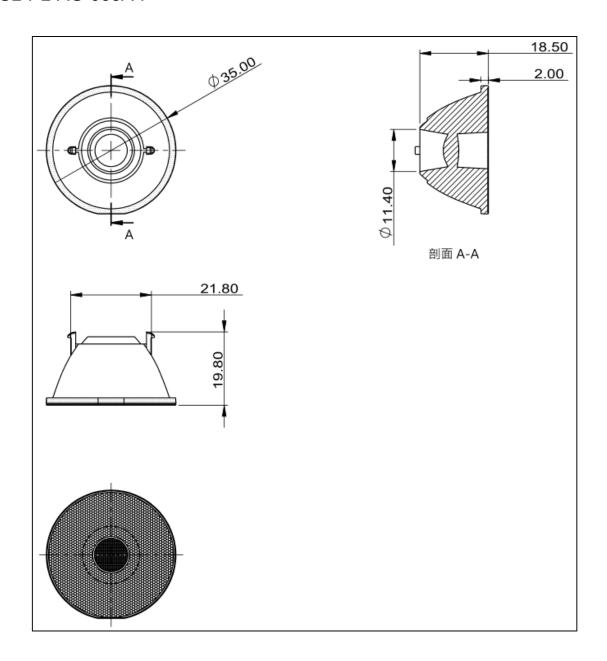

Distribution Curve Flux


Source: Cree CXA1304

SL-PL-AG-035A-S

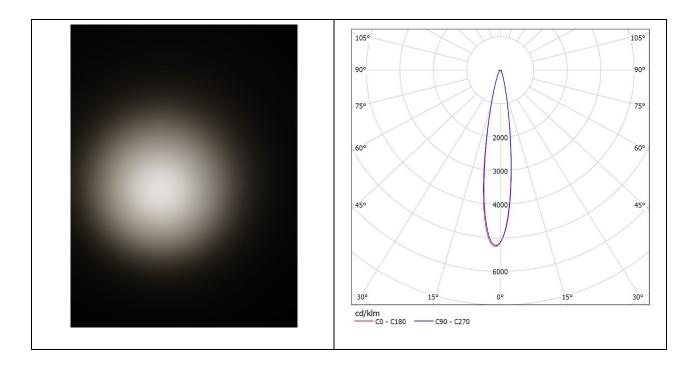


Source: Cree CXA1507

SL-PL-AG-035A-M

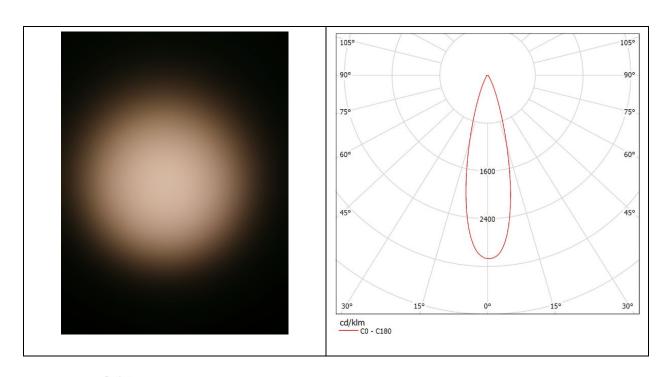



SL-PL-AG-035A-F

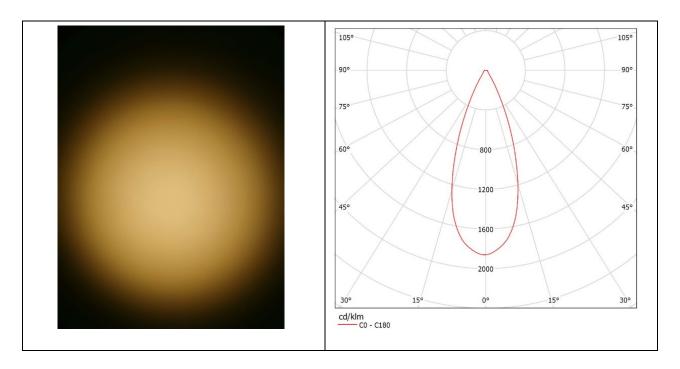



Notes

- It is not allowed to scrub the reflective surface. If there is dust on the surface, please clean by soft cotton with little water.
- It is forbidden to clean with industrial solvent such as ethanol.
- Storage temperature: 0°C-40°C, and humidity:30%-95%.
- Recommended operating temperature (PC) is <100°C.
- Keep reflector in package to void the dust.
- Prohibit the reflector touch with acid or alkaline solvent.

About Shinland

Shenzhen Shinland Co. Ltd, one of the longest and most professional company in reflector field, have years experience. Different from other factory which only have simple process, all aspects included R&D, making mold, mass production and market support are achieved by our exclusive resources.

Insisting on "Quality First, Service First" and pragmatic, enterprising spirit, building the market by quality, casting our brand by credibility and integrity, Shinland now become the leading supplier of second-optical solution in China.

