

SL-PL-AO-062A

Details

Material:	PC	
Process:	Injection	
Diameter:	62mm	
Heigh:	28mm	
Matched Holder:	Shinland's series AD holders	
Matched Cover:	None	
ROHS Compliant:	YES	
Status:	Ready	

Optical Properties

Code	Typ. Angle	Typ. efficiency
SL-PL-AO-062A-S	14°~20°	85%
SL-PL-AO-062A-M	24°~30°	86%
SL-PL-AO-062A-F	36°~41°	88%



Photo


Matched LED type






Dimensional Figure


Measure Unit : mm SL-PL-AO-062A-S

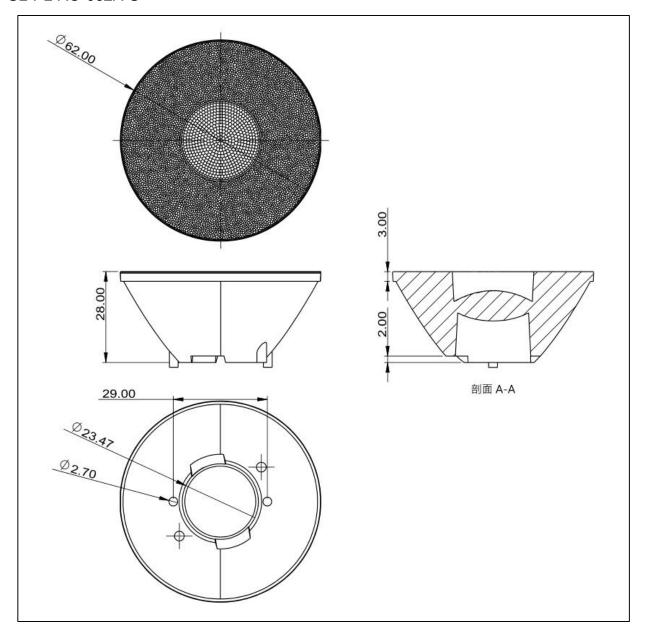

SL-PL-AO-062A-M

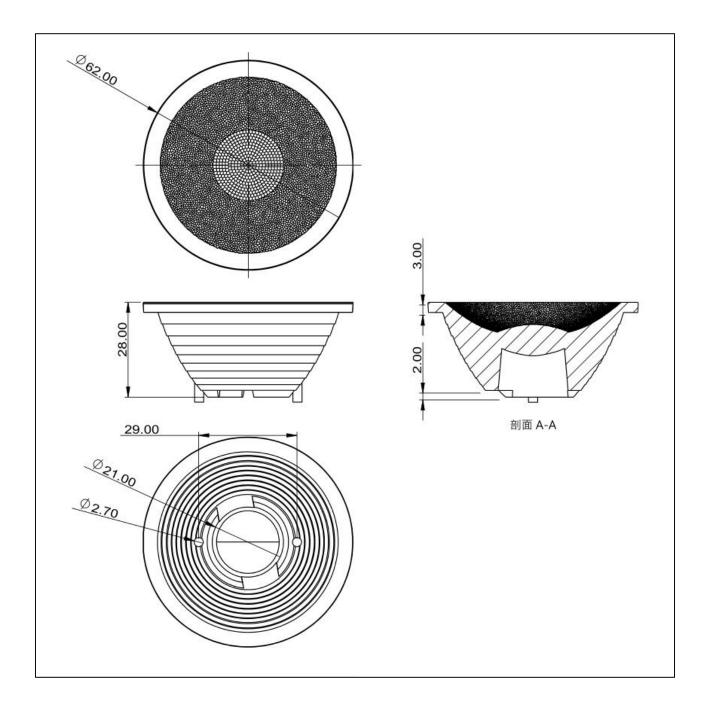


SL-PL-AO-062A-F

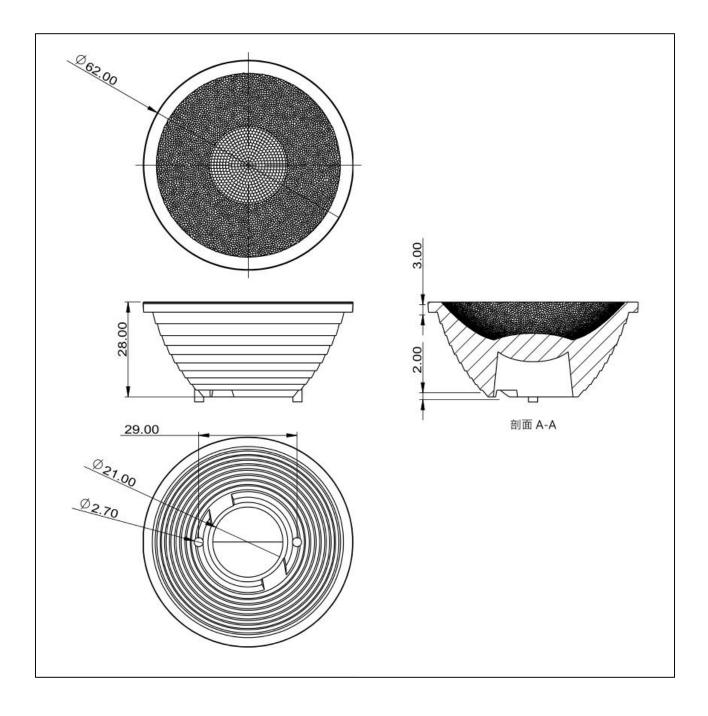


Distribution Curve Flux

Source:Citizen Clu028

SL-PL-AO-062A-S

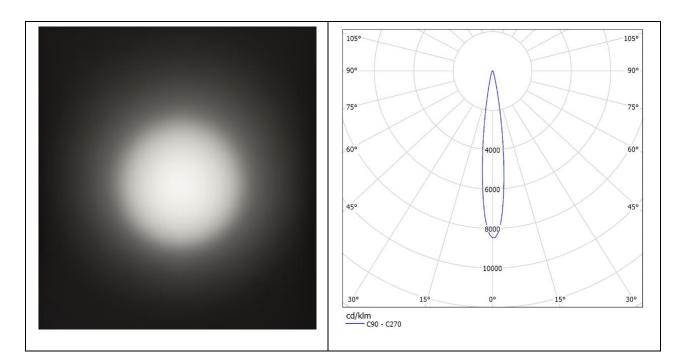


SL-PL-AO-062A-M

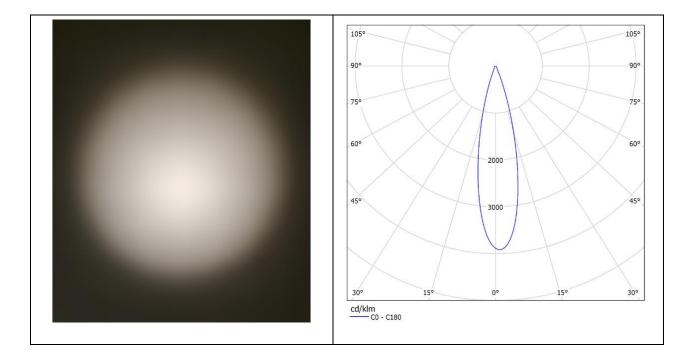



SL-PL-AO-062A-F

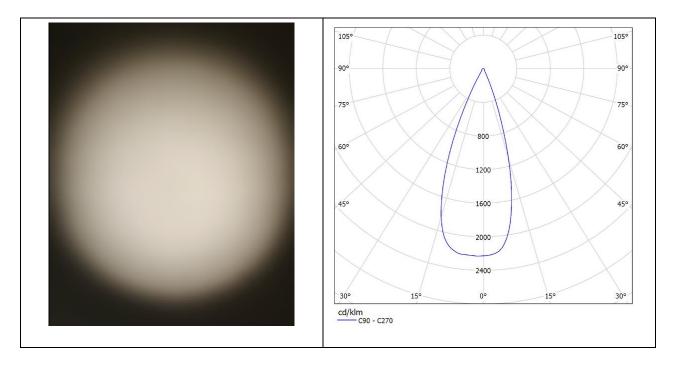

Notes

- It is not allowed to scrub the reflective surface. If there is dust on the surface, please clean by soft cotton with little water.
- It is forbidden to clean with industrial solvent such as ethanol.
- Storage temperature: 0°C-40°C, and humidity:30%-95%.
- Keep reflector in package to void the dust.
- Prohibit the reflector touch with acid or alkaline solvent.

About Shinland

Shenzhen Shinland Co. Ltd, one of the longest and most professional company in reflector field, have years experience. Different from other factory which only have simple process, all aspects included R&D, making mold, mass production and



market support are achieved by our exclusive resources.

Insisting on "Quality First, Service First" and pragmatic, enterprising spirit, building the market by quality, casting our brand by credibility and integrity, Shinland now become the leading supplier of second-optical solution in China.

